


TRUE TEMPER PART NO:		IRON NO:	A O.A.	FLEX	B BUTT REF	C TIP	FINISHED WEIGHT OUNCES GRAMS		BALANCE POINT (FROM BUTT)
PAMTS- 395	4-IRON	39.5	S	11.0	10.5	3.351	95.0	20.20	
PAMTS- 39	5-IRON	39.0	S	10.75	10.25	3.351	95.0	19.95	
PAMTS- 385	6-IRON	38.5	S	10.5	10.0	3.351	95.0	19.70	
PAMTS-38	7-IRON	38.0	S	10.25	9.75	3.351	95.0	19.50	
PAMTS-375	8-IRON	37.5	S	10.0	9.5	3.457	98.0	19.10	
PAMTS-37	9-IRON	37.0	S	9.75	9.25	3.563	101.0	18.75	
PAMTS-368	W	36.75	S	9.5	9.25	3.668	104.0	18.55	
PAMTS-365	SW	36.5	S	9.25	9.25	3.774	107.0	18.35	

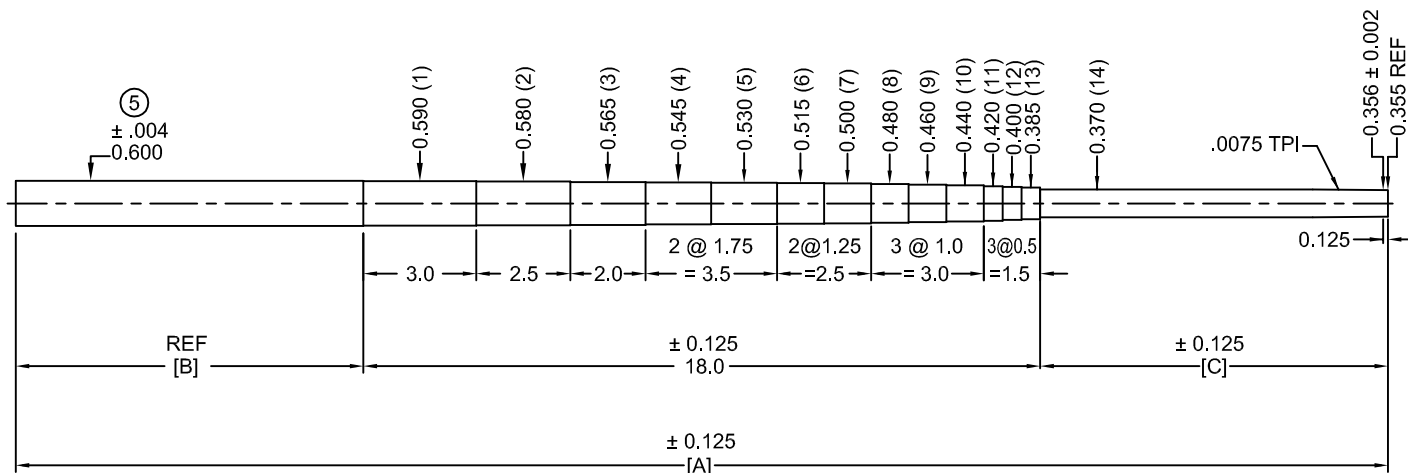

B	CORRECT TITLEBLOCK	AR	7/12/17
A	INITIAL PRODUCTION RELEASE	AR	4/5/17
REV	CHANGE	BY	DATE

NOTES

6 CONVENTIONAL STEP DESIGN

⑤ AVERAGE MEASURED DIAMETER

4 USE 150 GRIT BELT & LIGHT PRESSURE WHEN ABRADING TIP FOR ASSEMBLY.


3 FINISH: BRIGHT CHROME

2 PART MADE TO TRUE TEMPER PROCEDURE AND TEST STANDARDS.

1 NO GRAPHIC

TRUE TEMPER® 8275 TOURNAMENT DRIVE SUITE 200 MEMPHIS, TN 38125 (901) 746-2000	
DRAWN BY: A. RANDOLPH DESIGNER: TTS CORP. ENGINEERING: TTS MFG. ENGINEERING:	DESCRIPTION: ASCENDING MASS 95-107g S200 FLEX AMT RED PRODUCT FAMILY: PAMTS
PLANT MANAGEMENT: QUALITY ASSURANCE:	WORK ORDER NUMBER: VI56 DRAWING NUMBER: M-58-17
DATE: 3/31/17 SCALE: NONE ECR NUMBER:	TOLERANCES (EXCEPT AS NOTED) DECIMAL .X +/- 0.125 .XX +/- 0.063 .XXX +/- 0.002 STEP LOCATION (FROM TIP) +/- 0.063 (NON ACCUMULATIVE)
SIZE/SHEET: A / 1	REVISION B
THIS DOCUMENT IS THE PROPERTY OF TRUE TEMPER SPORTS. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO TRUE TEMPER SPORTS. NEITHER THIS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON OR COPIED, OR PUBLISHED WITHOUT TRUE TEMPER SPORTS PRIOR WRITTEN CONSENT.	

TRUE TEMPER PART NO:		IRON NO:	A O.A.	FLEX	B BUTT REF	C TIP	FINISHED WEIGHT OUNCES GRAMS		BALANCE POINT (FROM BUTT)	
PAMTR-395	4-IRON	39.5	R	9.0	12.5	3.316	94.0	20.20		
PAMTR-39	5-IRON	39.0	R	8.75	12.25	3.316	94.0	19.95		
PAMTR-385	6-IRON	38.5	R	8.5	12.0	3.316	94.0	19.70		
PAMTR-38	7-IRON	38.0	R	8.25	11.75	3.316	94.0	19.50		
PAMTR-375	8-IRON	37.5	R	8.0	11.5	3.422	97.0	19.10		
PAMTR-37	9-IRON	37.0	R	7.75	11.25	3.527	100.0	18.75		
PAMTR-368	W	36.75	R	7.5	11.25	3.633	103.0	18.55		
PAMTR-365	SW	36.5	R	7.25	11.25	3.739	106.0	18.35		

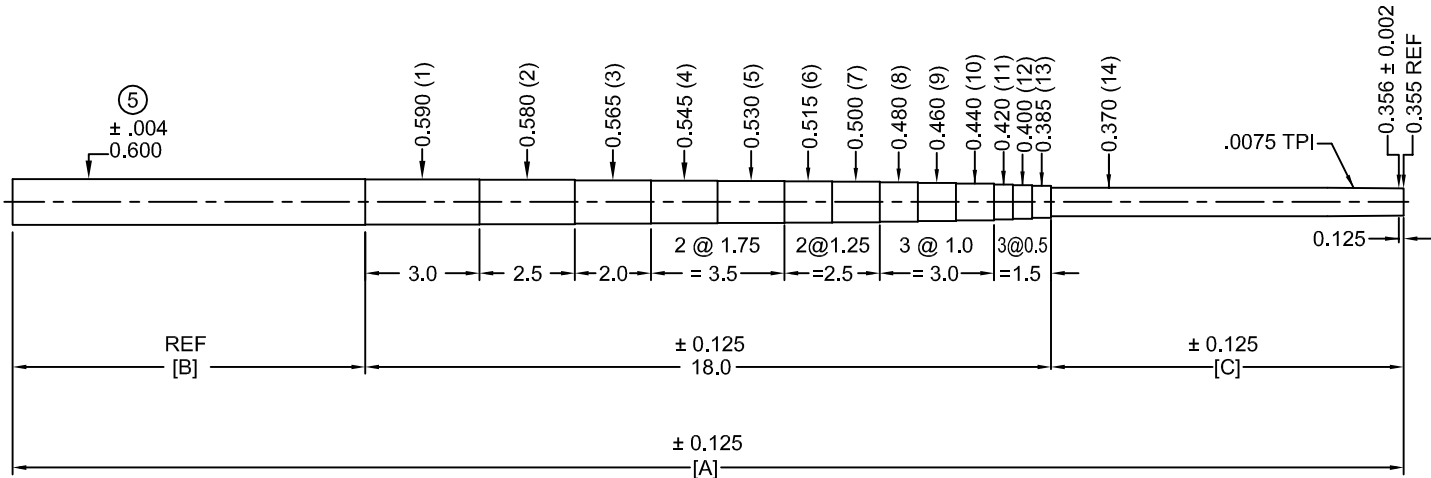

A	INITIAL PRODUCTION RELEASE	AR	4/5/17
REV	CHANGE	BY	DATE

NOTES

- 6 CONVENTIONAL STEP DESIGN
- ⑤ AVERAGE MEASURED DIAMETER
- 4 USE 150 GRIT BELT & LIGHT PRESSURE WHEN ABRADING TIP FOR ASSEMBLY.
- 3 FINISH: BRIGHT CHROME
- 2 PART MADE TO TRUE TEMPER PROCEDURE AND TEST STANDARDS.
- 1 NO GRAPHIC

8275 TOURNAMENT DRIVE
SUITE 200
MEMPHIS, TN 38125 (901) 746-2000

DRAWN BY:
A. RANDOLPH

DESIGNER:
TTS

CORP. ENGINEERING:
TTS

MFG. ENGINEERING:

PLANT MANAGEMENT:

QUALITY ASSURANCE:

DATE:
3/31/17

SCALE:
NONE

ECR NUMBER:

SIZE/SHEET:
A / 1

DESCRIPTION:
ASCENDING MASS 94-106g
R FLEX AMT RED

PRODUCT FAMILY:
PAMTR

WORK ORDER NUMBER:
VI56

DRAWING NUMBER:
M-59-17

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.X +/- 0.125
.XX +/- 0.063
.XXX +/- 0.002

STEP LOCATION (FROM TIP)
+/- 0.063 (NON ACCUMULATIVE)

REVISION
A

THIS DOCUMENT IS THE PROPERTY OF TRUE TEMPER SPORTS. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO TRUE TEMPER SPORTS. NEITHER THIS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON OR COPIED, OR PUBLISHED WITHOUT TRUE TEMPER SPORTS PRIOR WRITTEN CONSENT.